

TX 4017


TX



GEHL®


Capacities		Métrico	Imperial
Max. capacity		4000 kg	8818 lb
Max. lifting height		17.40 m	57 ft 1 in
Max. outreach		13.48 m	44 ft 3 in
Weight and dimensions			
Overall length to carriage	l1	6.20 m	20 ft 4 in
Overall width	b1	2.38 m	7 ft 10 in
Overall height	h17	2.59 m	8 ft 6 in
Wheelbase	y	2.90 m	9 ft 6 in
Ground clearance	m4	0.38 m	1 ft 3 in
Overall cab width	b4	0.85 m	2 ft 9 in
External turning radius (over tyres)	Wa1	4.05 m	13 ft 3 in
Unladen weight (with forks)		11275 kg	24857 lb
Overall weight		11235 kg	24769 lb
Forks length / width / section	l / e / s	1200 mm x 125 mm / 50 mm	47 in x 5 in / 2 in
Performances			
Lifting		13.60 s	13.60 s
Lowering		9.40 s	9.40 s
Extension		25 s	25 s
Retraction		14.10 s	14.10 s
Crowd		4.10 s	4.10 s
Dump		3.20 s	3.20 s
Engine			
Engine brand		Perkins	Perkins
Engine norm		Stage IIIA	Stage IIIA
Engine model		1104D-44T EPA	1104D-44T EPA
Number of cylinders / Capacity of cylinders		4 - 4.40 l	4 - 1 US gal
I.C. Engine power rating - Power (kW)		92 Hp / 70 kW	92 Hp / 70 kW
Max. torque		392 Nm	289 ft/lbs
Transmission			
Transmission type		Torque converter with manual transmission	Torque converter with manual transmission
Number of gears (forward / reverse)		4 / 4	4 / 4
Max. travel speed		28 km/h	17 mi/h
Parking brake		Manual	Manual
Service brake		Oil-immersed multi-discs braking on front & rear axles	Oil-immersed multi-discs braking on front & rear axles
Hydraulics			
Hydraulic pump type		Gear pump	Gear pump
Hydraulic flow / Pressure		96.70 l/min-250 bar	26 US gpm-3626 PSI
Tank capacities			
Hydraulic oil		120 l	32 US gal
Fuel tank		78.50 l	21 US gal
Noise and vibration			
Noise at driving position (LpA)		92 dB	92 dB
Noise to environment (LwA)		110 dB	110 dB
Miscellaneous			
Steering wheels (front / rear)		2 / 2	2 / 2
Drive wheels (front / rear)		2 / 2	2 / 2
Safety		Standard EN 15000	Standard EN 15000
Controls		Monolever	Monolever


TX 4017 - Diagrama dimensional

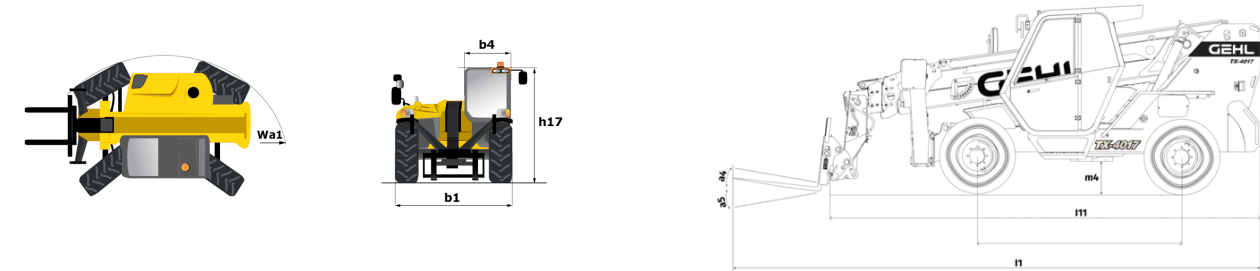

TX 4017 - Diagramas de carga

Load Chart metric

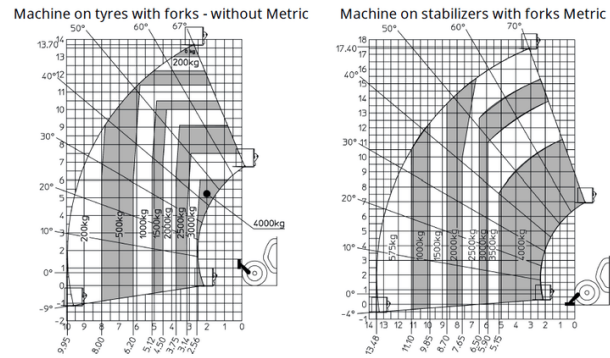

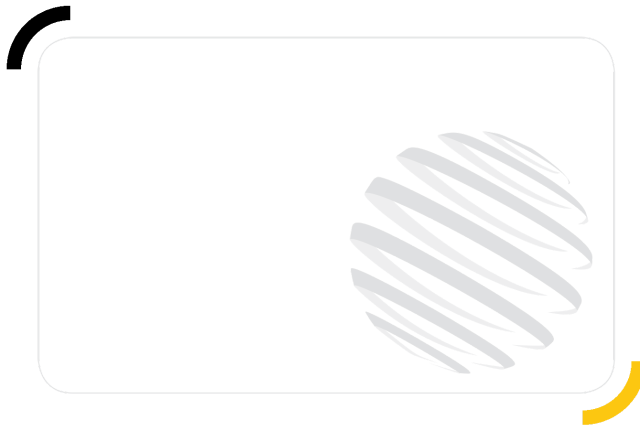

GEHL®

Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital:
39,668,399 euros - 857 802 508 RCS West Bend